

# PEDRALI®

## THE ITALIAN ESSENCE

Pedrali SpA

SP 122 - 24050 Mornico al Serio - Bergamo - Italia

Ufficio Commerciale Italia +39 035 8358810

Export Dept. +39 035 8358840




Fax +39 035 8358888

[www.pedrali.it](http://www.pedrali.it) - [info@pedrali.it](mailto:info@pedrali.it)



### LAJA 882\_VER

design Alessandro Busana

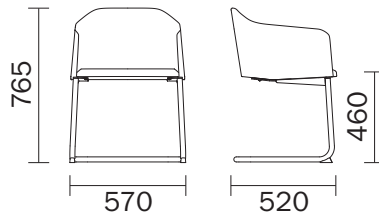

|  |   |
|--|---|
| <p><b>MATERIALI</b><br/>Materials / Materialien / Matériaux / Materiales</p>   | <p>- <b>SCocca</b> / SHELL / SCHALE / COQUE / CARCASA<br/> <b>Struttura interna in acciaio, con cinghie elastiche, stampata in poliuretano flessibile ignifugo (densità 60 kg/m³) /</b><br/> Internal structure made of steel with elastic bands, moulded fire retardant flexible polyurethane (density 60 kg/m³) /<br/> Inneres Gestell aus Edelstahl mit elastischen Gurten, Schale aus flexiblem Polyurethan, schwerentflammbar (Dichtigkeit 60 kg/m³) / Structure interne en acier, avec courroies élastiques, injectée en polyuréthane flexible ignifuge (densité 60 kg/m³) / Estructura interna de acero inoxidable con cinturón elástico, moldeo de poliuretano flexible ignifugo (densidad de 60 kg/m³)</p> <p>- <b>TESSUTO</b> / FABRIC / STOFF / TISSU / TEJIDO<br/> <b>Cat. A - C - G - H - P</b></p> <p>- <b>TELAIO</b> / FRAME / GESTELL / STRUCTURE / ARMAZÓN<br/> <b>Acciaio, tubo Ø25 mm / Steel, tube Ø25 mm / Stahl, Rohr Ø25 mm / Acier, tube Ø25 mm / Acero, tubo Ø25 mm</b></p> <p>- <b>FINITURA TELAIO</b> / FRAME FINISH / AUSFÜHRUNG DES GESTELL / FINITION STRUCTURE / ACABADO ARMAZÓN<br/> <b>Verniciato con polvere epossipoliestere / Epoxy-polyester powder coating / Epoxy-polyester pulverbeschichtet / Vernissage à poudre époxy-polyestère / Pintado epoxidico</b></p> |
| <p><b>UTILIZZO</b><br/>Uso / Verwendung / Emploi / Uso</p>   | <p><b>Contract, indoor</b></p>  |
| <p><b>NORMATIVE e CERTIFICAZIONI</b><br/>Regulations and certificates / Bestimmungen und Zertifikat / Normatives et certifications / Normativas y certificados</p> | <p><b>Conforme alla norma: carico statico sul sedile-schienale EN 1728:2012 - EN 16139:2013, livello L2 - estremo</b><br/> Conforming to: seat and back static load test EN 1728:2012 - EN 16139:2013, level L2 - extreme</p> <p><b>Conforme alla norma: resistenza a fatica del sedile-schienale, 200.000 cicli EN 1728:2012 - EN 16139:2013, livello L2 - estremo</b><br/> Conforming to: combined seat and back fatigue test, 200.000 cycles EN 1728:2012 - EN 16139:2013, level L2 - extreme</p>  |
| <p><b>ALLEGATI</b><br/>Attachments / Anlage / Annexes / Anexos</p>   | <p>Pulizia e manutenzione / Use &amp; care / Nutzung und Pflege / Nettoyage et entretien / Uso y mantenimiento</p>  |